

S54 不锈钢中型

STAINLESS STEEL MEDIUM DUTY

载重 Load

130-150kg



脚架说明


Frame Instruction

- 材料: 不锈钢304 方板厚: 3mm 支架厚: 2mm
Material: 304# stainless steel Plate thickness: 3mm Bracket thickness: 2mm
- 螺丝孔: $\phi 8$ mm
Screw hole: $\phi 8$ mm
- 支架宽度: 41mm
Bracket width: 33mm

轴承说明


Bearing Instruction

轴承型号	材质	D	d	H
6001	SUS 440C	28	12	8




平顶万向安装尺寸图

Plate Swivel Mounting Instruction

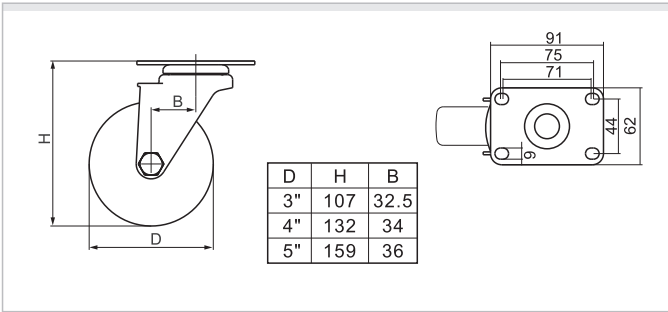


平顶刹车安装尺寸图

Plate Brake Mounting Instruction

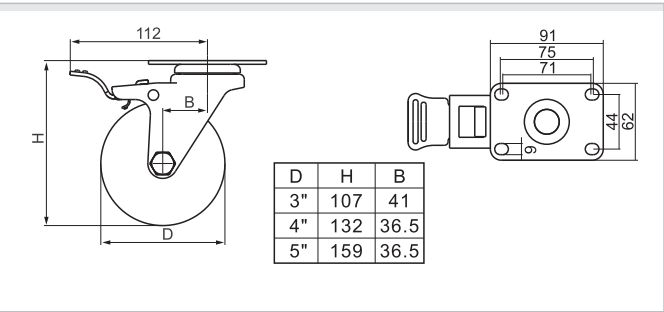


丝口万向安装尺寸图

Threaded Swivel Mounting Instruction

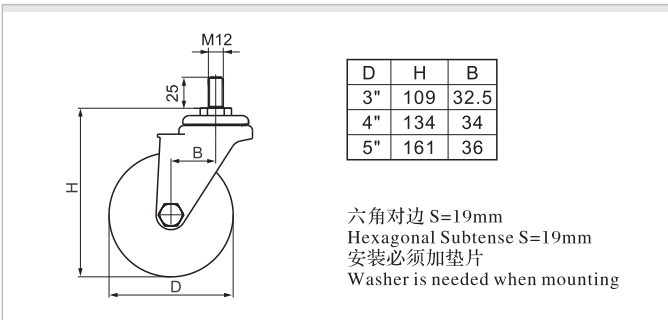

空颈万向安装尺寸图

Bolt hole Swivel Mounting Instruction

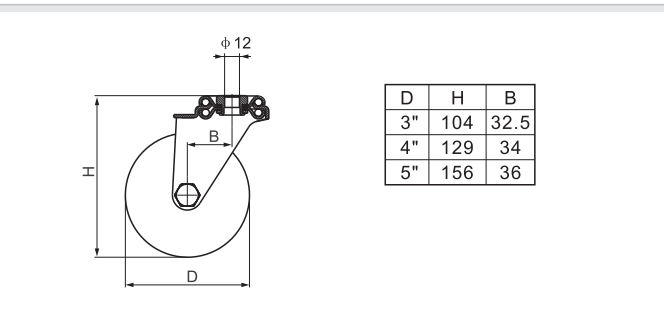

脚架货号说明

Frame Item No. Instruction

规格	定向	平顶万向	平顶刹车	丝口万向	丝口刹车	空颈万向	空颈刹车	刹车示意图
Size	Rigid	Plate Swivel	Plate Brake	Threaded Swivel	Threaded Brake	Bolt Hole Swivel	Bolt Hole Brake	Brake Instruction
3"	S54703	S54713	S54723	S54733	S54743	S54773	S54783	 L-铁双刹 Iron Dual Brake
4"	S54704	S54714	S54724	S54734	S54744	S54774	S54784	
5"	S54705	S54715	S54725	S54735	S54745	S54775	S54785	

标配轮子货号说明

Wheel Item No. Instruction

图片	轮子货号	规格					芯子材料	胎面材料	滚动轴承	适用温度	胎面硬度
Photo	Wheel item no.	Size				Kg	Core	Tread	Bearing	Applicable temperature	Hardness
	S503-25	3"	75	32	41	150	/	PA 尼龙	特尔灵 Derlin	-20℃~120℃	67D
	S504-25	4"	100								
	S505-25	5"	125								
	S503-65	3"	75	32	41	140	PP 聚丙烯	PU 聚氨酯	特尔灵 Derlin	-20℃~80℃	95A
	S504-65	4"	100								
	S505-65	5"	125								
	S503-75	3"	75	32	41	150	PP 聚丙烯	PU 聚氨酯	特尔灵 Derlin	-20℃~80℃	95A
	S504-75	4"	100								
	S505-75	5"	125								
	S503-85	3"	75	32	41	150	PP 聚丙烯	TPU 高强度聚氨酯	特尔灵 Derlin	-20℃~80℃	95A
	S504-85	4"	100								
	S505-85	5"	125								

可选配双轴承轮子

Optional: Double Ball Bearing Wheels



*All metal accessories are made of stainless steel.