

S26 不锈钢小型
STAINLESS STEEL MINI DUTY

载重 Load
35-50kg




脚架说明 Frame Instruction


-  材料: 不锈钢304 方板厚: 2mm 支架厚: 2mm
Material: 304# stainless steel Plate thickness: 2mm Bracket thickness: 2mm
-  螺丝孔: $\phi 6\text{mm}$
Screw hole: $\phi 6\text{mm}$
-  支架宽度: 25mm
Bracket width: 25mm

轴承说明 Bearing Instruction


轴承型号 Bearing Type	材质 Material	D	d	H
608	SUS 440C	22	8	7




平顶万向安装尺寸图 Plate Swivel Mounting Instruction

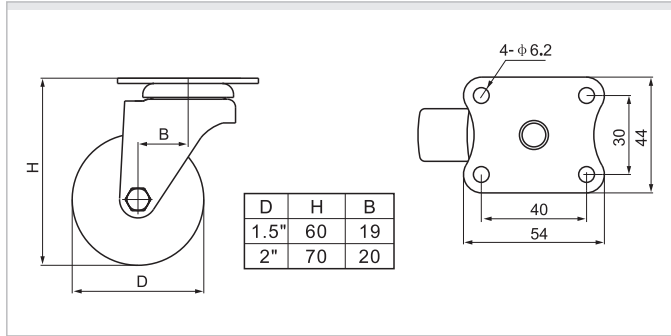


平顶刹车安装尺寸图 Plate Brake Mounting Instruction

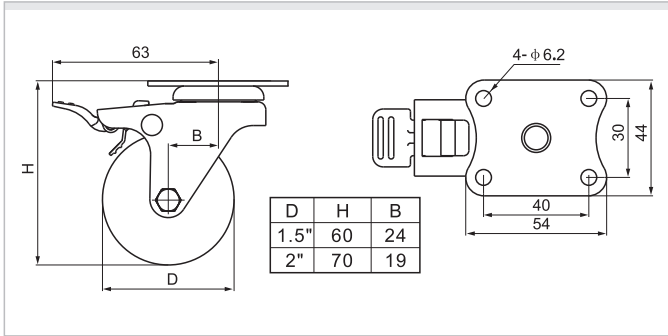

丝口万向安装尺寸图 Threaded Swivel Mounting Instruction

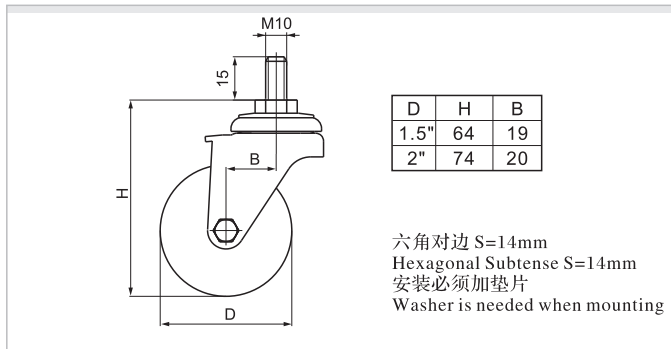

丝口刹车安装尺寸图 Threaded Brake Mounting Instruction

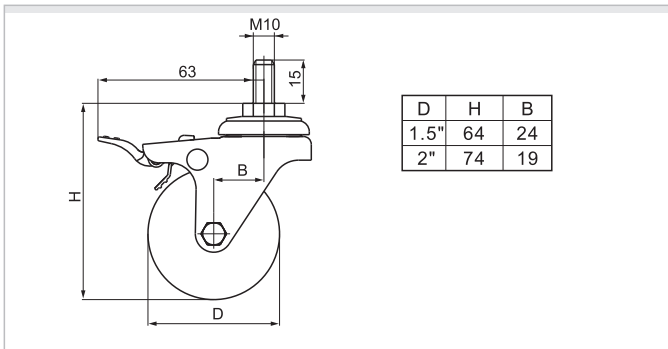


脚架货号说明 Frame Item No. Instruction

规格 Size	定向 Rigid	平顶万向 Plate Swivel	平顶刹车 Plate Brake	丝口万向 Threaded Swivel	丝口刹车 Threaded Brake			刹车示意图 Brake Instruction
1.5"	S267015	S267115	S267215	S267315	S267415			 H-塑双刹 Plastic Dual Brake
2"	S26702	S26712	S26722	S26732	S26742			

标配轮子货号说明 Wheel Item No. Instruction

图片 Photo	轮子货号 Wheel item no.	规格 Size					芯子材料 Core	胎面材料 Tread	滚动轴承 Bearing	适用温度 Applicable temperature	胎面硬度 Hardness
	S2615-03	1.5"	38	20	25	45	/	PA 尼龙	螺栓 Bolt	-20℃~80℃	67D
	S262-03	2"	50			50					
	S2615-23	1.5"	38	20	25	45	/	PA 尼龙	螺栓 Bolt	-20℃~120℃	67D
	S262-23	2"	50			50					
	S2615-53	1.5"	38	20	25	45	PP 聚丙烯	TPE 超级人造胶	螺栓 Bolt	-30℃~70℃	65A
	S262-53	2"	50			50					
	S2615-73	1.5"	38	20	25	35	PP 聚丙烯	PU 聚氨酯	螺栓 Bolt	-20℃~80℃	95A
	S262-73	2"	50			40					

可选配双轴承轮子 Optional: Double Ball Bearing Wheels

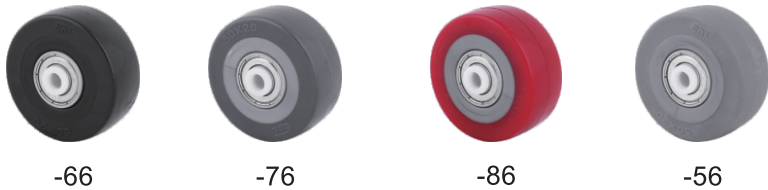

*All metal accessories are made of stainless steel.